



Nelmor

PROVIDING SOLUTIONS, NOT JUST EQUIPMENT



AT500 SERIES TANGENTIAL CENTRAL GRANULATOR

The AT500 Tangential Series central granulator offers superior quality and performance with ease of accessibility. A safety interlocked, rear access, hopper door provides hassle-free cleanout and inspection, while the front hopper access door completely opens up for quick and easy maintenance with minimal downtime.

Available in 3- and 5- knife rotors, with high shear or steep angle rotors, the AT500 series encompasses the design elements for the widest variety of application needs.

A side mount motor design permits drive motor to be right-hand or left-hand positioned and completely opens rear service area for maintenance and cleanout.

STANDARD FEATURES

- The AT500 Series includes 712mm (28"), 915mm (36") and 1220mm (48") wide models for a wide range of applications
- Motor range includes 30kW (40hp), 37kW (50hp), 45kW (60hp), 55kW (75hp), and 75kW (100hp) TEFC motors
- Offset cutting chamber, 2 Twinshear™ bed knives, top access: single edge, HCHC
- Cutting chamber geometries are available for tangential, offset, and 3-bed knife orientations
- Standard configuration is sound suppressed, with option for full sound enclosed configuration
- Large 500mm (20") cutting circle for enhanced part ingestion
- Discharge is right-hand or left-hand regardless of motor placement
- Innovative design creates enlarged screen area via segmented swing-down reversible screens which provides optimized accessibility, increased throughput and minimal clean out and maintenance access time
- Industry leading unique design enhances safety measures and creates easy serviceability
- Rotational side walls limit friction and smearing and improve granulate quality. Outboard bearing mounting increases bearing protection to the highest level, and eases maintenance steps
- Open wing rotor style enhances throughput while increasing cutting performance
- Mechanical rotor lock for maintenance
- Air purge bearings for cooling and contamination prevention




AT500 SERIES TANGENTIAL GRANULATOR

www.aecinternet.com



Model	Cutting Chamber Size (mm, in)	Rotor	Motor (kW, hp)	Throughput (kg, lbs.)
AT-5070	508mm x 712mm (20" x 28")	3 or 5 knife, open rotor	30kW (40hp) std., 37kW (50hp), 45kW (60hp), 55kW (75 hp), 75kW (100hp) option	up to 900 kg/hr (2000 lbs./hr)
AT-5090	508mm x 915mm (20" x 36")	3 or 5 knife, open rotor	37kW (50hp) std., 45kW (60hp), 55kW (75hp), 75kW (100hp) option	up to 1350 kg/hr (3000 lbs./hr)
AT-50120	508mm x 1220mm (20" x 48")	3 or 5 knife, open rotor	55kW (75hp) std, 75kW (100hp) option	up to 1575 kg/hr (3500 lbs./hr)

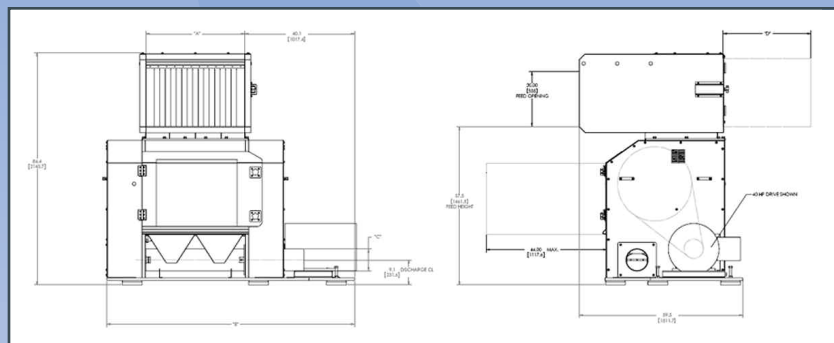


Dimensions (in, mm)				
Model	A	B	C	D
AT-5070	28" (712mm)	82.4" (2092mm)	6" (152mm)	32" (812mm)
AT-5090	36" (915mm)	90.4" (2295mm)	8" (200mm)	4" (1016mm)
AT-50120	48" (1220mm)	102.4" (2600mm)	10" (254mm)	52" (1320mm)



Cutting chambers are available for tangential, offset, and 3-bed knife configurations



Ease of access and maintenance with front hopper access door



Twin shear rotor configuration for superior and optimized part ingestion



Standard tangential cutting chamber can be modified for bed knife placement to suit changing and demanding production requirements

www.aecinternet.com
aecweb@corpemail.com

AEC is committed to a continuing program of product improvement. Specifications, appearances and dimensions are subject to change without notice.
 © 2011 AEC Bulletin NE6-185.3 Printed in USA

AT500 SERIES TANGENTIAL GRANULATOR



Global Headquarters:

AEC Schaumburg
 1100 E. Woodfield Rd #588
 Schaumburg, IL 60173
 Tel: +1 847 273 7700
 Fax: +1 847 273 7804

AEC New Berlin
 2900 S. 160th Street
 New Berlin, WI 53151
 Tel: +1 262 641 8610
 Fax: +1 262 641 8653



AEC Suzhou
 109 Xingpu Road SIP
 Suzhou, China 215126
 Tel: +86 512 8717 1919
 Fax: +86 512 8717 1916



AEC Warsaw
 ul.Dziakowa 115
 02-234 Warszawa
 Tel: + 48 22 390 9720
 Fax: + 48 22 390 9724



AEC India
 Regus, Level 2, Connaught Place
 Bund Garden Road, Pune 41100, India
 Tel: +91 20 4014 7575/40147615
 Fax: +91 93 7115 4045