

TrueTemp™ MINI SERIES

Water Temperature Control Unit



Technical Specifications

For production applications requiring exact temperature control in limited spaces, nothing measures up to the TrueTemp™ Series Mini Water Temperature Control Units from AEC. Mini Water Temperature Control Units have an operating leaving water temperature range of 32°F up to a maximum of 250°F (121°C).

Each Mini Series TCU delivers huge performance in a compact package. Available with heater configurations in 3kW, 6kW or 9kW, these units provide consistent and reliable heating - just the kind of innovation you expect from the leader in temperature control.

Features


Standard Features

- 1/16 DIN microprocessor based PID controller
- Non-ferrous construction
- Easily removable panels for quick access to internal components
- Incoloy™ immersion heater with IEC contactors
- Pressure switch set at 150 psig
- NEMA 1 electrical enclosure
- 250°F (121°C) maximum operating temperature
- Motor Circuit Protector
- Independent high temperature safety thermostat
- 3/4" on all connections
- 1/2 - 3/4 hp process pumps with silicone carbide seals
- 1 year parts and labor warranty at the factory
- 3 year controller warranty

Optional Features

- Casters; available in lieu of rubber feet
- Manual bypass
- Pressure regulator/relief valve for water supply (shipped loose)
- Y-Strainer (shipped loose)
- Quick cool switch
- Auto system water purge (mold purge), shipped loose
- General fault audible/visual alarms
- Remote Start/stop
- Communications – RS232, RS485, RS485-SPI
- Ten-foot power cord; no plug, shipped loose
- Rotary, thru-the-door disconnect switch
- UL/cUL-listed electrical subpanel
- Remote controller with enclosure and 20 ft. cable, shipped loose
- Operating voltages: 208/3/60, 230/3/60, 400/3/50, 575/3/60
- Pressure gauges (Shipped loose, to be mounted on back of unit)

Product Diagrams

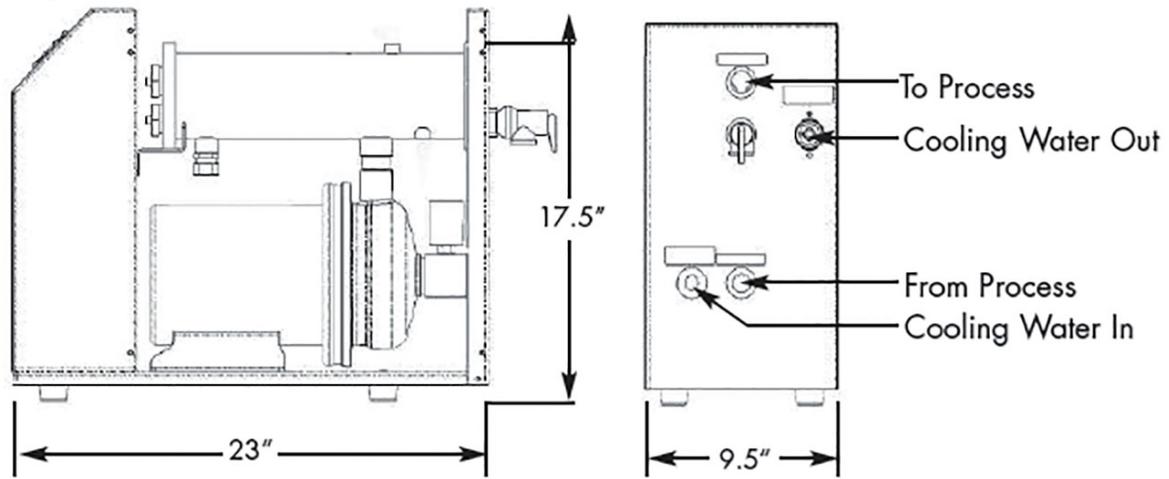

Specifications

Model Number	Pump, HP (kW)	Flow, gpm (lpm)	Pressure, psig (bar)	FLA 3kW Height, in. (mm)	FLA 6kW Width in. (mm)	FLA 9kW Depth, in. (mm)	Ship. weight, lbs. (kg)
T50	0.5 (0.37)	15 (57)	20 (1.4)	17.5 (445)	9.5 (241)	23 (584)	110 (50)
T75	0.75 (0.56)	20 (76)	23 (1.6)	17.5 (445)	9.5 (241)	23 (584)	110 (50)