

ROX-800 Mist Eliminator

For medium size machine tools!

Suitable for medium to large machine tools up to 250 ft³ enclosures. Ideal for high pressure coolant.

The innovative 1st stage mechanical elements separates up to 95% of the mist. The 2nd stage agglomerator is very unique, manufacture in layers of stainless steel wire mesh weaved with oil attracting fibers. Efficiency is high as the air travels though a bed of coarse and fine fibers at a low velocity. Channels between each layer provide exceptional fluid drainage. Optional is a On-Line Cleaning system for flushing out congealed coolant concentrate and fine solids. Alternatively, the media can be cleaned in placed with coolant or water hose. On most applications, cleaning is only every 2-3 years. The 2nd stage media is very durable, lasting 10 - 15 years. Must select coolant or oil filter.

The 3rd stage HEPA filter captures sub-micron mist, smoke and bacteria. Exclusive heavy duty media, no other product holds as much oil or lasts as long. Typical life is 2 - 4 years.



Air flow 700 - 850 cfm Pressure (HEPA) 0 - 3.5" wg **HEPA Filter** 95% @ 0.3 microns

1 hp Motor rating

230/460/3/60 (2.96/1.48) Voltage (amps)

575/3/60 (1.18) 3450 rpm 160°F / 70°C

Temperature (max) Weight 330 lbs / 150 kg Length 40" / 1016 mm Width 25" / 635 mm Height (motor)

32" / 813 (43" / 1052 mm)

Inlet connection

Sound level 76 dB(A) @ 1m Clean air measurement $< 0.020 \text{ mg/m}^3$

Optional:


Speed

2nd stage coolant filter 2nd stage oil filter On-Line Cleaning System HEPA 99.97% @ 0.3 microns

Accessories:

Installation kit Suction hose Machine adaptor for suction hose Chip strainer Motor starter panel VFD motor starter



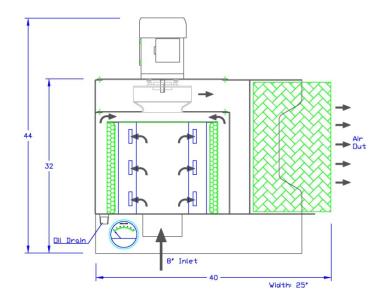

AEROEX Technologies Inc. 17 Hamilton Road Barrie, ON, Canada, L4N 8Y6 Tel: 705-734-0549 Fax: 705-734-1013 Sales Tel: 905-655-7295 e:mail: sales@aeroex.com

www.aeroex.com