


X SERIES

Central Granulators

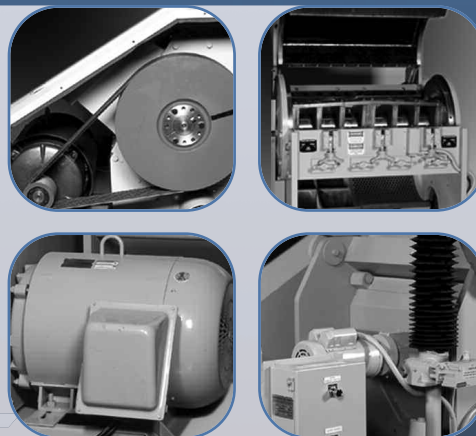

Versatility and Strength For the Toughest Injection Molded Parts

Cumberland's X Series is one of the most versatile central granulators available. Ideally suited for applications including large injection or blow molded parts, automotive moldings, light purgings, furniture and appliance parts. The X Series comes in 3 widths—27", 39" and 55", with throughput rates ranging from 1800 to 6000 lbs/hr. The X Series also features low-heat granulation made possible through its unique rotor and cutting chamber design that prevents polymer "melt-down" and virtually eliminates "endplate smearing".

www.cumberland-plastics.com

Features

- Unique rotor and disc design reduces frictional heat, helps prevent end plate smearing
- Exclusive Twinshear™ slicing action reduces energy consumption, fines and extends knife life
- Split chamber, easy cleanout service access

Options

- Multiple hopper designs
- Adjustable rotor knives
- Replaceable rotor knife seats

Low Heat Granulation

- Unique rotor and cutting chamber design helps prevent polymer "melt down"
- Virtually eliminates "end plate smearing"
- End ring (disc) rotates in relationship to the cutting chamber, vastly improving airflow and minimizing frictional heat

Reduced Energy Consumption

- Made possible by the Twinshear™ "scissor cutting" action knife design
- More efficient than chopping motion knife designs
- Uses lower horsepower motor without sacrificing throughput performance

Easy Accessibility and Cleanout

- Due to split chamber design, which raises the upper half of the cutting chamber, and lowers the screen cradle and discharge assembly via motorized screw jacks
- 50% reduction in cleanout time
- Simplifies access for knife adjustments and replacement
- Air evacuation piping system does not need to be disconnected

Specifications	X700	X1000	X1400
Throat Size	600 x 700 mm (24" x 28")	600 x 1000 mm (24" x 40")	600 x 1400 mm (24" x 56")
Cutting Circle	600 mm (23 5/8")		
Throughput (3/8" screen)	820 kg (1800 lbs.)	1200 kg (2500 lbs.)	1600 kg (3500 lbs.)
Infeed	Convey		
Cutting Chamber	(2) Bed Knife Chevron		
Rotor	(3) Knife Chevron		
Rotor Knives	(6) HCHC		
Bed Knives	(4) HCHC		
Screen Diameter	9.4 mm (3/8" dia.)		
Base	Plate Type		
Discharge	Airveyor		
Motor	37 kW (50 HP)	90 kW (100 HP)	90 kW (125 HP)
I	V-Belt		
Electrical	Safety switches wired into common junction box		
C _r	To suit voltage - 110V at operator station		
L _i	Labels and plates provided for operator safety		
Acc	Conveyors, blowers, cyclone separators to suit application		
Feec	2175 mm (104 3/4")		
L _r	2660 mm (104 3/4")		
Width	1473 mm (58")	1778 mm (70")	2184 mm (86")
H	3429 mm (125")		
Weight	4545 kg (10,000 lbs)	5910 kg (13,000 lbs)	7270 kg (16,000 lbs)

Global Headquarters

Cumberland Schaumburg
1100 E. Woodfield Road
Suite 550
Schaumburg, IL 60173
Tel: +1 (262) 641 8600
Fax: +1 (262) 641 8653

Cumberland New Berlin
2900 S 160th Street
New Berlin, WI 53151
Tel: +1 (262) 641 8600
Fax: +1 (262) 641 8653

Cumberland Suzhou
109 Xingpu Road SIP
Suzhou, China 215126
Tel: +86 512 8717 1919
Fax: +86 512 8717 1916

Cumberland Warsaw
ul. Działkowa 115
02-234 Warszawa
Tel: + 48 22 390 9720
+ 48 22 390 9721
+ 48 22 390 9722
Fax: + 48 22 390 9724

Cumberland India
Gat No. 191/1, Sandbhor Complex,
Mhalunge, Chakan, Tal Khed,
Dist. Pune 410501, India
Tel: +91 21 35329112
Fax: +91 20 40147576

