
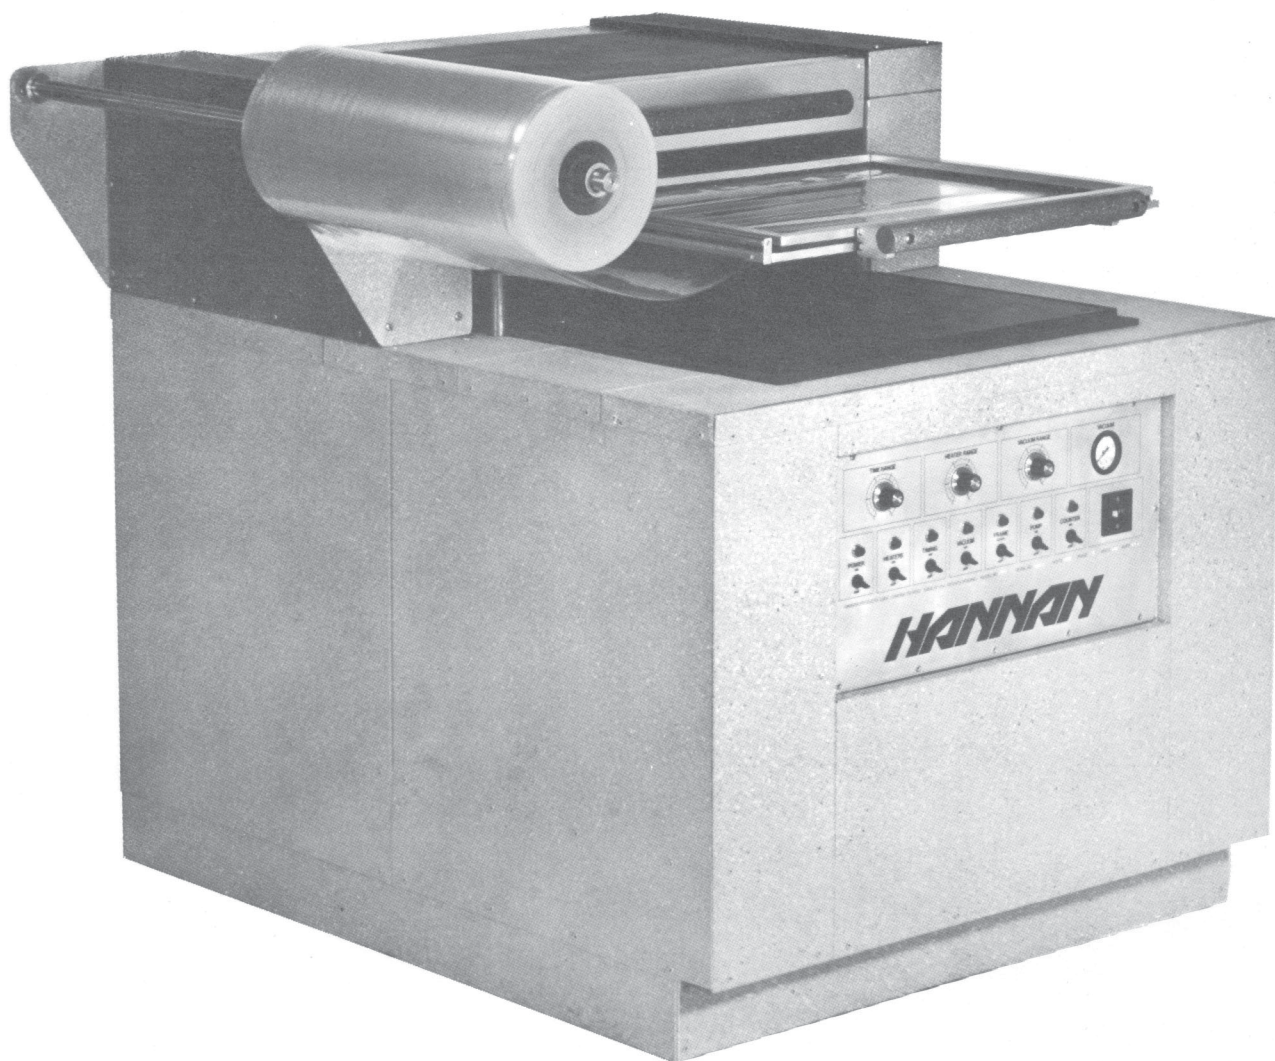


Skin Packaging Machinery 405 T

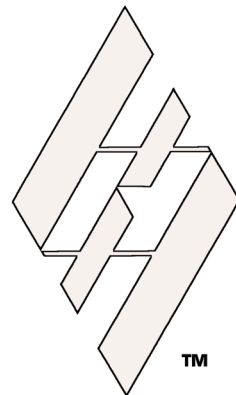

“THE PROFESSIONALS’ CHOICE”

HANNAN®

© 2005 HANNAN PRODUCTS CORP.

SKIN PACKAGING/ VACUUM FORMING MACHINERY

The HANNAN Model 405 T has been engineered and designed for trouble free, efficient operation. With its cantilevered film frame and film roll carrier, the 405 T is ready for either side or front loading. A balanced infrared reflector oven with industrial tubular elements provides the fastest film heating cycle available.

The film heating and frame cycles are automatically controlled by a solid state timer that is adjustable to precisely match your product, skin card, and film requirements for optimum results. Manual overrides for the automatic cycle permit the flexibility for samples, short runs, and intermixing products of varying heights.

HANNAN equipment is engineered to withstand rugged, continuous production use with a minimum of maintenance. From its 16 gauge steel construction to its heavy duty industrial finish, the 405 T is an excellent choice for energy efficiency and cost effectiveness. Years of production and engineering improvements have given HANNAN equipment a reputation for reliability, operating simplicity, and durability.

STANDARD FEATURES:

- ◆ High Efficiency, Balanced Heating System
- ◆ Cantilevered Oven, Film Frame, Film Roll Carrier
- ◆ Oversized Platen -- Accepts Full 18" x 24" Sheets
- ◆ Wired To N.E.C. Standards
- ◆ High Performance Vacuum Turbine
- ◆ Solid 16 GA. Steel Construction
- ◆ Heavy Duty Industrial Finish
- ◆ Recessed Kick Panel
- ◆ Air Filter Lubricator Assembly
- ◆ Constant On Oven for Rapid Cycle Times
- ◆ (No "Heat Up" or "Cool Down" Cycles)

OPTIONS:

- ◆ Variable Vacuum Control
- ◆ Vacuum Gauge
- ◆ Production Monitoring Counter
- ◆ Variable Heater Range
- ◆ Internal Compressor
- ◆ 220 V Three Phase Electrical
- ◆ 440 V Three Phase Electrical

SPECIFICATIONS:


Skin Card Size 18" X 24"
Film Thickness 1 Mil To 1/8"
Film Roll Size Standard 20" Wide X 3" Core
Electrical 220V 1 PH 60 HZ

**** 40 PSI LOW VOLUME AIR SUPPLY REQUIRED**


OPERATING SEQUENCE:

(Controls preset, frame in up position)


- 1 - Place master card (with products in position) on platen.

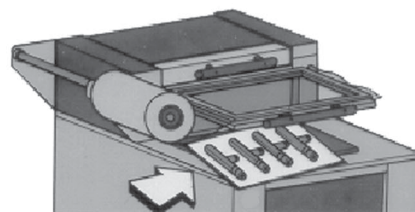


- 2 - Pull the oven out initiating the automatic heat cycle.

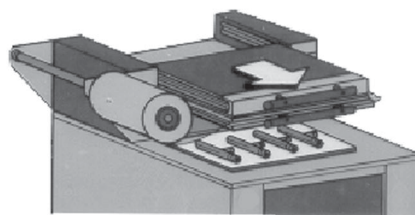

- 3 - When heat cycle is completed, film frame automatically lowers and vacuum turbine seals film to card.

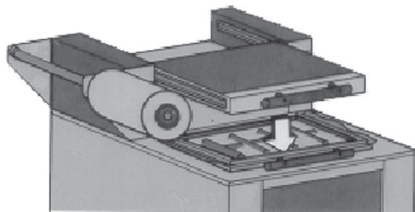

- 4 - When film is completely sealed, flip frame switch to "Down" position and push oven back. Open film frame, pull sealed package to the right. Reclamp frame. Film is now ready for next cycle.

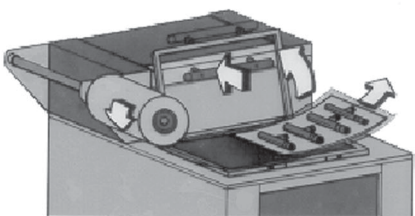

DIMENSIONS (LOW PROFILE)

Working Height 32"
O/A Height 46.5"
O/A Width 46.5"
O/A Depth 48"
Min. Wall Clearance 24"

HANNAN®

Made in the U.S.A.

HANNAN PRODUCTS CORP.
220 NORTH SMITH STREET, CORONA, CA. 92880
FAX: (951) 735-0827
TELEPHONE: (951) 735-1587 / (800) 954-4266
Website: www.hannanpak.com
Email: sales@hannanpak.com