




Dual Column DC-2038RB1

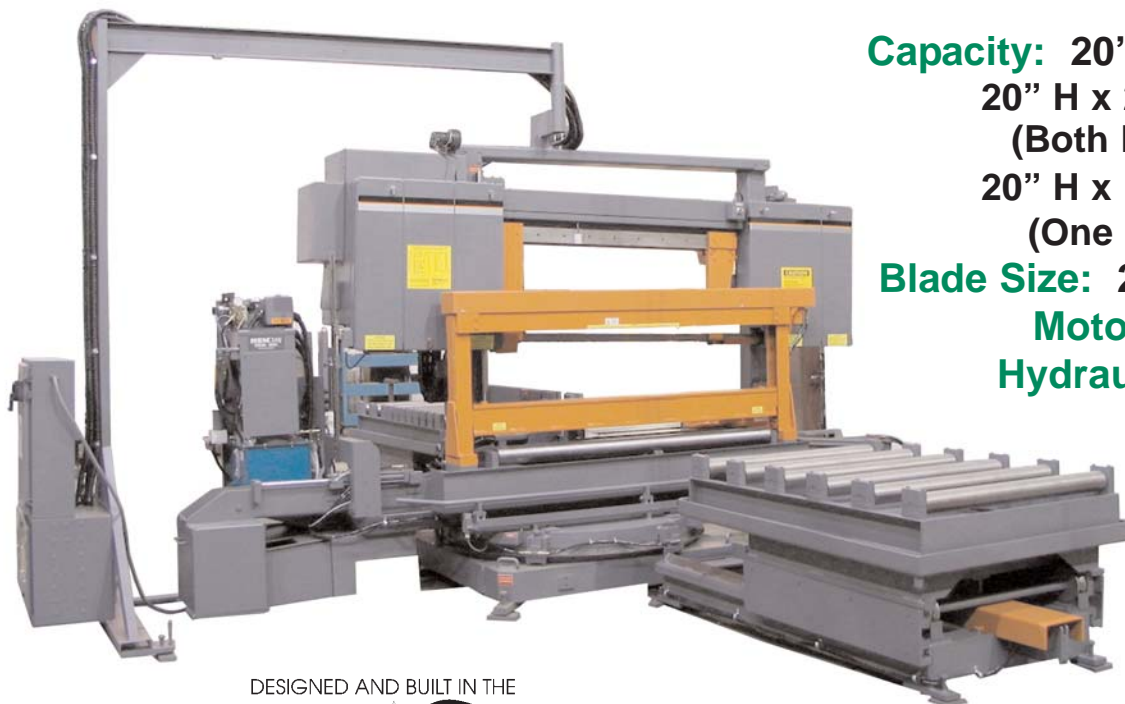

DESIGNED AND BUILT IN THE
U.S.A.

**Shown w/ Optional Top Clamp & Optional Telescoping Roller Tables*

Standard Features:

Pedestal Console - Manual control
w/ 30' Umbilical
Rotary Table for Base to Pivot
2 Degree Arm Cant
Vising on Both Sides of Blade
Moveable Guide Arm from Console
Adjustable Clamping Pressure (0-2,500 lbs.)
Powered Miter Controlled From Console
Flood Coolant System
Electronically Controlled Traverse (ECT)
Controls Feed Rate & Cutting Force
Carbide Blade Guides
Powered Blade Brush
Automatic Shut Off If Blade Breaks
Powered Blade Tension
Infinitely Variable Blade Speed (75-400 SFPM)
LED Blade Speed Readout w/ Blade Stall



Optional Features:

- Cut Watcher System
- Roller Table - Input Side (Telescopes)
- Roller Table - Output Side (Telescopes)
- Semi-Automatic Operation
- Computer Controlled Traverse (HCCT)
- Chip Conveyor System
- Top Clamp (Available Input & Output Sides)
- Laser Light System
- Spray Mist Coolant System

P. O. Box 1148 • Pryor, OK • 74362

www.hemsaw.com

Toll Free: (888) 729-7787 • Phone: (918) 825-4821
Fax: (918) 825-4824 • E-Mail: info@hemsaw.com