


# HEM Horizontal Miter: Sidewinder A-C

**Capacity:** 12.75" x 16" w @ 90° • 10" x 10" w @ 45° Left

**Blade:** 1" x 13'6" x .035" • **Bar-Feed:** 0-24" (Multiple Indexes) • **Motor:** 3 HP

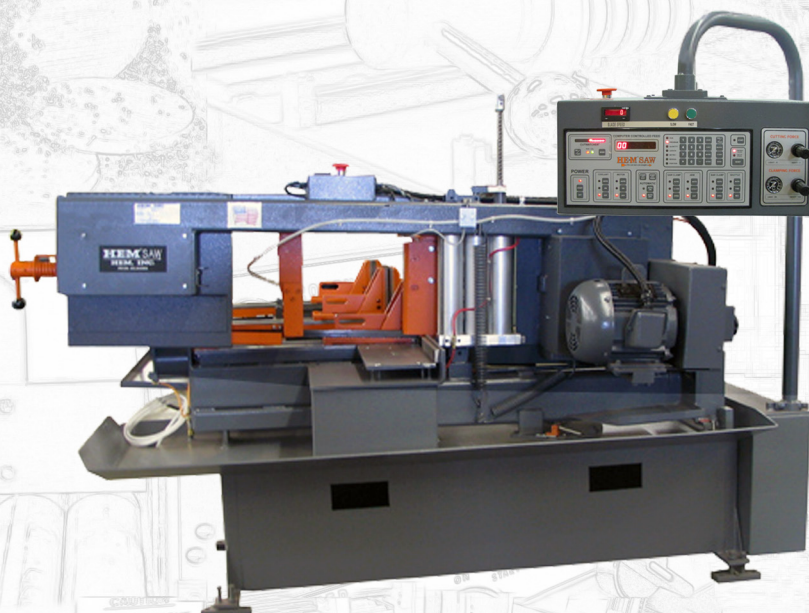

## Standard Features

Easy View Console – All Function Control

Computer Controlled Feed System

18" Exit Support

Adjustable Main & Feed Vise

Adjustable Clamping Force

2 Hold Down Fixtures

Vertical Alignment Bar on Feed

Adjustable Blade Speed w/ LED Readout

Carbide Blade Guides

Cut Watcher System

Adjustable Cutting Force & Feed Rate

Manual Blade Tension

Manual Guide Arm Adjustment

Blade Brush

Flood Coolant System w/ Wash-Down Hose

Broken Blade / Out of Stock Indicators

Safety Guards

220V/440V/3PH Electrical Motor Requirement

85 PSI, 4-6 CFM Minimum Air Requirement

(Equipped w/ Air Filter/Lubricator)

**Proudly Made in the U.S.A.**



## Optional Features

Reduced Capacity Top Clamp – Feed Vise

Reduced Capacity Top Clamp – Main Vise

3rd Holding Vise on Feed

60° Miter Capability (Manual Cut Only)

Full Width Discharge Plate

Laser Light System

Pedestal Mounted Console

Spray Mist Lubrication

5' Roller Stock Table

10' Idle Roller Stock Table



[www.hemsaw.com](http://www.hemsaw.com)

**Address:** P.O. Box 1148 Pryor OK 74361 • **Toll Free:** 888-729-7787 • **Email:** [info@hemsaw.com](mailto:info@hemsaw.com)

HEM, Inc., whose policy is one of continuous improvement, reserves the right to change the price, specifications, or design, as well as discontinue any model, at any time without notice and without incurring any obligations. Dimensions may vary. Please contact HEM, Inc. for a certified dimensional drawing of your specific model.  
Copyright 112800 HEM, Inc. All rights reserved.