


HEM Vertical: VT100LM-60

Capacity: 18" w x 20.75" h @ 90° • 18" w x 14.25" h @ 45° L • 18" w x 14" h @ 45° R
18" w x 9.75" h @ 60° L • 18" w x 6.75" h @ 60° R • **Blade:** 1-1/4" x 15'6" x .042" • **Arm Cant:** 4°
Motor: 5 HP

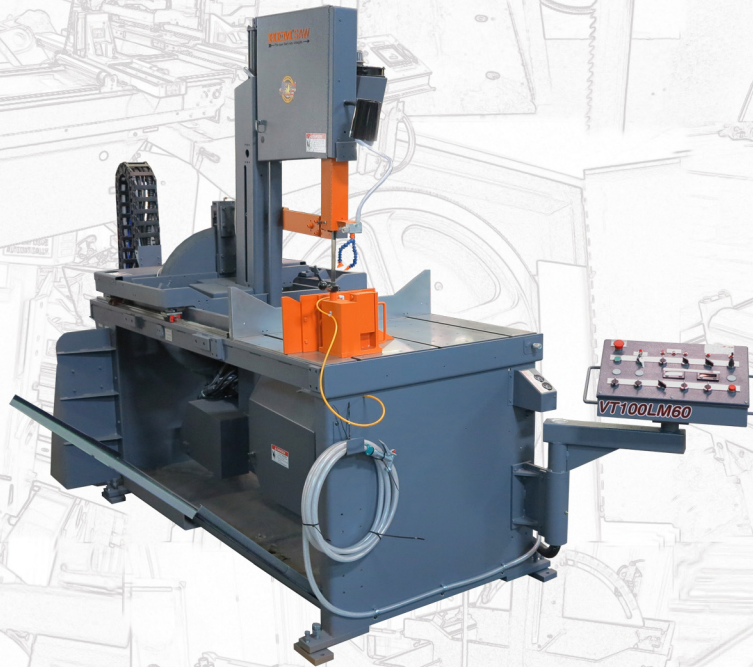

Standard Features

- Swing-Away Console – Manual Control
- Powered Tilt w/ Angle Readout
- Adjustable Blade Speed w/ LED Readout
- Adjustable Cutting Force
- Adjustable Feed Rate
- Blade Brush
- Carbide Blade Guides
- Air Powered Blade Tension
- Adjustable Main Vise
- Adjustable Clamping Force
- Powered Guide Arm
- Flood Coolant System w/ Wash-Down Hose
- Boltable Side Wings for Coolant Drainage
- Broken Blade Indicator
- Safety Lockout Key & Safety Guards

220V/440V/3PH Electrical Motor Requirement
85 PSI, 4-6 CFM Minimum Air Requirement
(Equipped w/ Air Filter/Lubricator)

Proudly Made in the U.S.A.



Optional Features

- Swing-Away Top Clamp – Main Vise
- Laser Light System
- 2nd Main Vise
- Spray Mist Lubrication
- Idle Stock, Load & Discharge Tables

HEM[®] SAW
—The saw that cuts straight.—

www.hemsaw.com

Address: P.O. Box 1148 Pryor OK 74361 • **Toll Free:** 888-729-7787 • **Email:** info@hemsaw.com

HEM, Inc., whose policy is one of continuous improvement, reserves the right to change the price, specifications, or design, as well as discontinue any model, at any time without notice and without incurring any obligations. Dimensions may vary. Please contact HEM, Inc. for a certified dimensional drawing of your specific model.
Copyright 112800 HEM, Inc. All rights reserved.