
HEM Wide Flange: WF160LA-DC-C

Capacity: 30" W x 25" H • Blade: 2" x 26'9" x .063" • Motor: 15 HP Hydraulics: 5 HP • Bar-feed: 0-72" (Multiple Index)

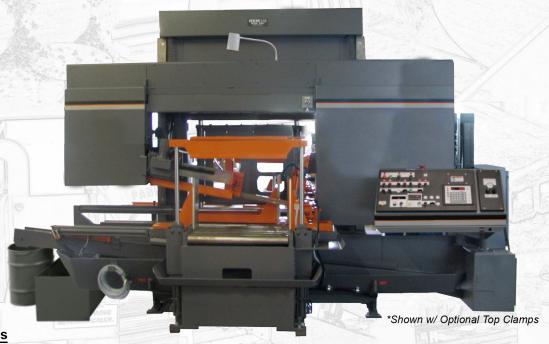

Standard Features

Swing-Away Console – All Function Control Computer Controlled Feed System

9.2° Permanent Arm Tilt

24" Roller Discharge Table

Full Stroking Bi-Directional Vises

Adjustable Clamping Force

3rd Holding Vise on Feed

Carbide Blade Guides

Lead In/Lead Out Roller Guides

Cut Watcher System

Adjustable Cutting Force & Feed Rate

Powered Guide Arm

Push Button Blade Speed w/ LED Readout

Blade Brush

Chip Conveyor System

Height Adjusted from Console

Material Jogging

Powered Blade Tension

Flood Coolant System w/ Wash-Down Hose

Broken Blade & Out of Stock Indicators

Safety Lockout Key & Safety Guards

220V/3PH or 440V/3PH Electrical Motor Requirement

- This is Not a Dual Voltage Machine

Proudly Made in the U.S.A.



Optional Features

Full Capacity Top Clamp – Main & Feed Vise
Full Capacity Top Clamp – Main Vise Only
Full Capacity Top Clamp – Outboard Vise
Bi-Directional Outboard Powered Vise
Hydraulic Computer Controlled Traverse
2-5/8" Blade Option
Laser Light or Shadow Light System
Spray Mist Lubrication
Optional Control Consoles
5' or 10' Discharge Table Extension
Idle or Powered Roller Stock Tables



www.hemsaw.com

Address: P.O. Box 1148 Pryor OK 74361 • Toll Free: 888-729-7787 • Email: info@hemsaw.com

HEM, Inc., whose policy is one of continuous improvement, reserves the right to change the price, specifications, or design, as well as discontinue any model, at any time without notice and without incurring any obligations. Dimensions may vary. Please contact HEM, Inc. for a certified dimensional drawing of your specific model.

Copyright 112800 HEM, Inc. All rights reserved.