


HEM Wide Flange: WF190MRB-DC

Capacity: 44" W x 25" H @ 90° • 27" W x 25" H @ 45° • 16" W x 25" H @ 60° Left

Blade: 2" x 31'4" x .063" • **Motor:** 15 HP • **Hydraulics:** 5 HP

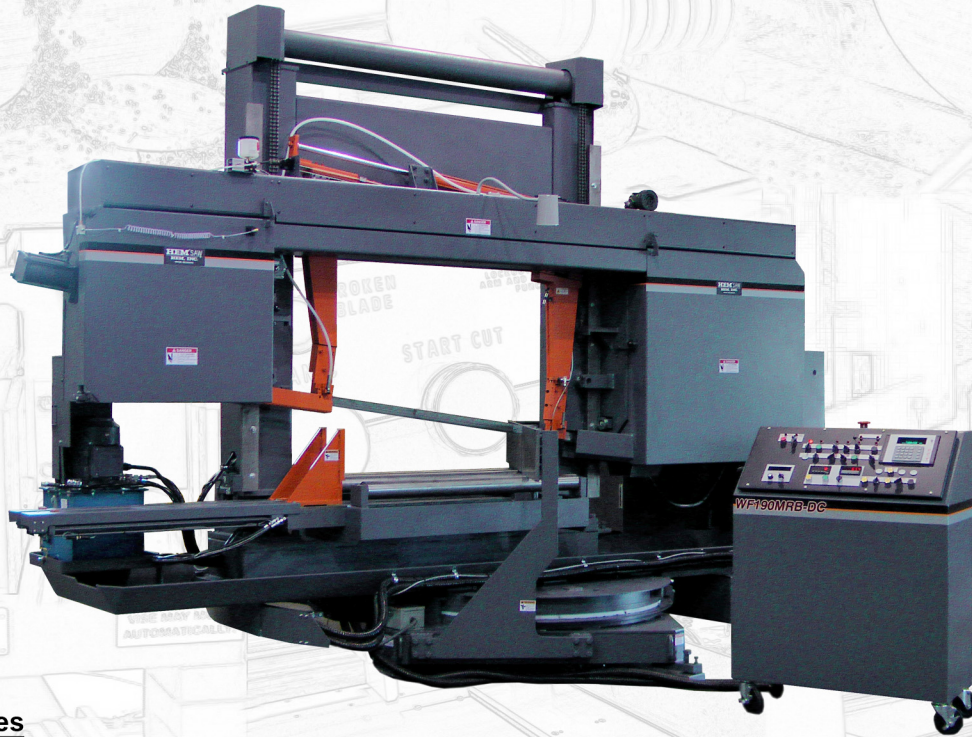

Standard Features

- Rotary Base Machine
- Free Standing Console w/ 25' Umbilical – Manual Control
- 7° Permanent Arm Tilt
- Hydraulic Computer Controlled Traverse (HCCT)
- Powered Miter w/ LED Angle Readout
- Vises on Both Sides of the Blade
- Adjustable Clamping Force
- Push Button Blade Speed w/ LED Readout
- Height Adjusted from Console
- Carbide Blade Guides
- Guide Cap Camlocks
- Powered Blade Tension
- Powered Guide Arm
- Blade Brush
- Flood Coolant System w/ Wash-Down Hose
- Broken Blade Indicator
- Safety Lockout Key
- Safety Guards
- Lead In/Lead Out Roller Guides

220V/3PH or 440V/3PH Electrical Motor Requirement
– This is Not a Dual Voltage Machine

Proudly Made in the U.S.A.



Optional Features

- 4' Sliding Table w/ Idle Rollers – Input Side
- 4' Sliding Table w/ Idle Rollers – Output Side
- Top Clamp (Available Input & Output Sides)
- Chip Conveyor System
- Cut Watcher System
- Laser Light System
- Shadow Light System
- Spray Mist Lubrication

HEM[®] SAW
—The saw that cuts straight.—

www.hemsaw.com

Address: P.O. Box 1148 Pryor OK 74361 • **Toll Free:** 888-729-7787 • **Email:** info@hemsaw.com

HEM, Inc., whose policy is one of continuous improvement, reserves the right to change the price, specifications, or design, as well as discontinue any model, at any time without notice and without incurring any obligations. Dimensions may vary. Please contact HEM, Inc. for a certified dimensional drawing of your specific model.
Copyright 112800 HEM, Inc. All rights reserved.