



NANTONG JUGAO MACHINERY COLTD

ADD: LIBAO INDUSTRY PARK HAIAN COUNTRY JIANGSU PROVINCE CHINA POST CODE:226600

TEL: 0086513-88283988 FAX:0086513-88932366 MOBILE:008613222111178

E-MAIL: INFO@NTJUGAO.COM <http://www.ntjugao.com>

Hydraulic Press brake technical data

A、 Machine model name

1、 Type: 2WE67K-1000TX6000 Hydraulic press brake

Machinery

Leading manufacturer

In China



High Quality

Competitive price

Best service



Nantong Jugao Machinery Co Ltd Tel:008651388932366 Mobile:008613222111178
Add:Libao Industry Park Haian Couty Nantong City Jiangsu Provice

2、 BRAND: JUGAO. TOP RANKING QUALIT




CE certification brand

CE certification brand

WORLD CLASS

21,000 square meters
Workshops

WORLD CLASS

to ensure high-quality machines



STRENGTH

Monthly production
capacity reached 500

The strength witness

Industry-leading scale








360° PLEASANT EXPERIENCE

JUGAO
YOU CAN TRUST

360° Pleasant experience
Attentive service

NANTONG JUGAO

FOR MACHINES, WE ARE MORE PROFESSIONAL QUALITY

B: General Features

- 2-WE67K series using the same specification two-cylinders or triplex host .They are with the double linkage synchronizer.
- Double linkage press brakes. They can produce features products, Especially suitable for urban construction, highway light poles, power poles, and other specialty long length products.
- These two machines can be used alone or together, It can improve production efficiency in this way.
- Electric adjustment, manual fine adjustment, and digital display for backgauge distance and stroke of up ram.
- Special demanding can be specifically designed by order.

C: Characteristic of our machine is superior to other Chinese machines

- Using the Gear pump .Othe Chinese machines adope the axial piston pump.Our pump with lower noise, higher quality and advanced technology.
- Using the energy accumulator for returning stroke.Othe Chinese machine use the nitrogen cylinders. Our returning can avoid frequency nitrogen-padded .only need oil charge ,and only need one time a year under normal operation .It's easier to operate ,and efficiency is improved .
- Our machine with infrared protection device at back gauge area.
- Press brake with safety guard.

MORE COMPETITIVE PRICE.WELCOME TO OUR COMPANY


D、The main technical data

No	Name		Data	Unit	Remarks
1	Nominal pressure		2X10000	KN	
	Max bending thickness		25	mm	Middle steel
2	Length of working table		2X6000	mm	
3	Plate yield strength		≤250	mpa	
4	The distance of columns		4800	mm	
5	Ram stroke		400	mm	
6	Max opening height		1200	mm	
7	Throat depth		1100	mm	
8	Working speed		8	mm/se g	
9	High speed		80	mm/se g	
10	Return speed		65	mm/se g	
11	Ram speed	Free	50	mm	
		Running	7	mm	
		Return back	60	mm	
12	Main motor	Type	Y160M-6		
		Power	4X37	KW	
		Speed	970	rpm	
13	Max pressure of system		30	Mpa	
14	Axial piston pump	Type	25MCY14-1B		
		Speed	25	L/min	
		Pressure	12.5	Mpa	
15	Dimension	Length	12300	mm	
		Width	2600	mm	
		Height	5500	mm	

Nantong Jugao Machinery Co Ltd Tel:008651388932366 Mobile:00861322211178
Add:Libao Industry Park Haian Couty Nantong City Jiangsu Provice

EXCELLENT QUALITY, RELIABLE

E: The main components supporting manufacturers (Opinions)

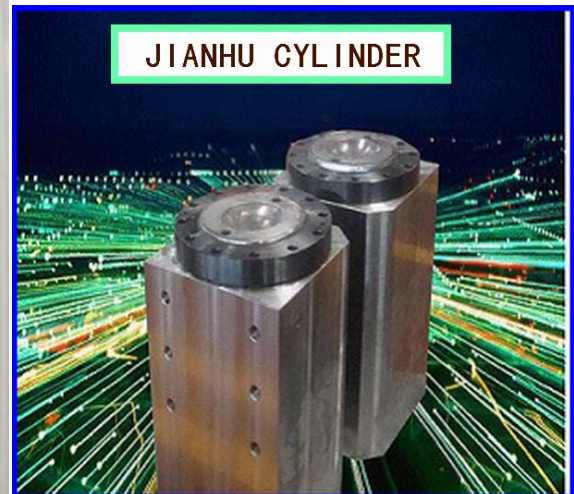

This first-class quality assurance

Nantong Jugao Machinery Co Ltd Tel:008651388932366 Mobile:008613222111178
Add:Libao Industry Park Haian Couty Nantong City Jiangsu Provice

JUGAO MACHINERY, HEART SERVICES


servo motor




ball-screw




HD-0036




HD-0037




HD-0038




HD-0039




HD-0040




HD-0041




HD-0042





HD-0043



HD-0044



HD-0045

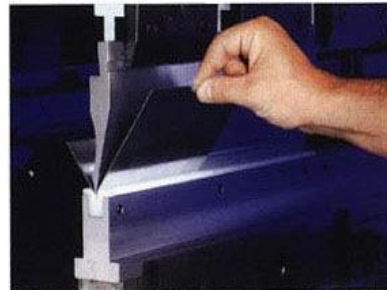

QUALITY MACHINES,QUALITY SERVICE

F .Press brake operation Guide

Notice: Read marks on the machines before using.

Safety reminder

Read before using

Lubricating parts

NO	Lubrication point	Lubrication method	Lubrication interval
1	Roller guide back plate	with oil	Before use
2	Roller guide	with oil	Before use
3	Guide rail	with oil	Before use
4	Roller support	with oil	Before use
5	Rolling of connecting rod	with oil	Before use
6	Connecting rod	with oil	Before use
7	Roller support	with oil	Before use
8	Roller support	with oil	Before use

Upper tools choosing

G: Control system of machine



MORE COMPETITIVE PRICE. PLEASE CHOSE JUGAO



Digital readout




back stop move forward and back button



Slide move up and down button.

X Axis value digital readout




Y Axis value digital readout



MORE COMPETITIVE PRICE. PLEASE CHOSE JUGAO

H: The produce can be produced. Special bend shape should be by the special mould. We can supply the special moulds by customer's demanding.

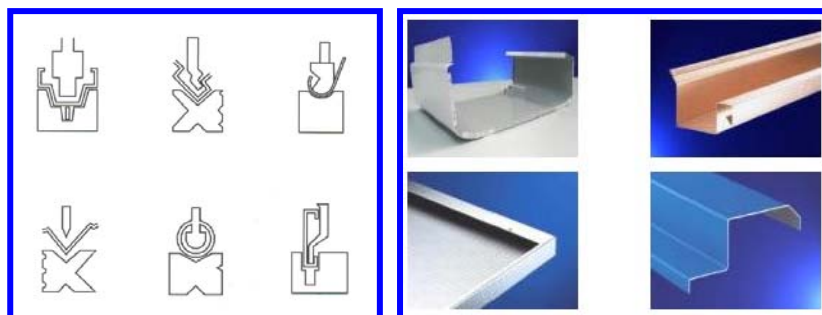

I: Machine standard accessories

1.Front support material	2sets
2.Moving foot operating station plateform	1set
3.Anchor bolt:	4pcs
4.Adjustment bolt	4pcs
5.Oil Gun	1pc

J: Warranty

100% warranty in one year.

K: Delivery time:

In 90days after seller receive the deposit.

L:Remittance Information

Account Bank: BANK OF CHINA LTD.,HAIAN SUB-BRANCH

SWIFT CODE: BKCHCNBJ95G

Bank Add: 18 Changjiang Rd(m), Haian, Nantong, Jiangsu, China 226600

Beneficiary: NANTONG JUGAO MACHINERY CO.,LTD.

A/C NO.: 535258233084

Note: The copyright of this document belong to Nantong Jugao

NANTONG JUGAO MACHINERY CO LTD(Techonogy Department)

Service Hotline: 008651388932366