

PGC – 2系統ホール コンペンセーティングチャック –


2 Way Hole, Compensating Chuck



外観図 Drawing

内径把握時

when it's clamping the inner diameter

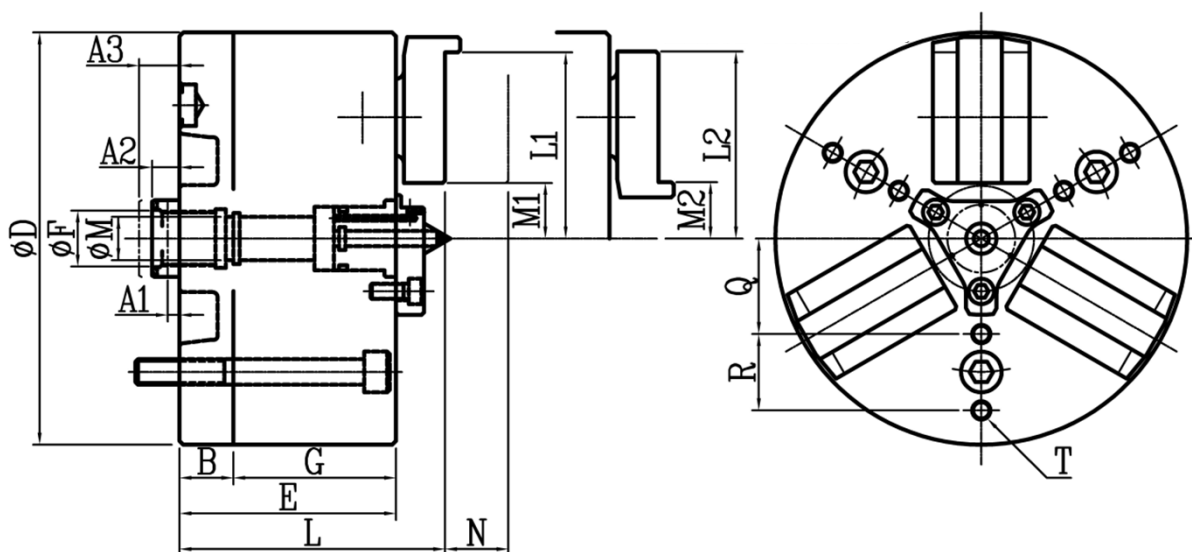

仕様 & 寸法 Specification & Size

項目 Item	型式 Model	PGC-6	PGC-8	PGC-10	PGC-12	PGC-15	PGC-18	PGC-21
把握力 Gripping Force	KN	64.7	87.3	105.8	105.8	161.7	161.7	161.7
ドロー力 Max. Draw-Pull	KN	21.6	28.4	35.3	35.3	53.9	53.9	53.9
最高回転数 Max Speed	mm ⁻¹	3000	2800	2500	2000	1600	1200	900
直径爪ストローク Jaw Stroke	mm	7.9	9.5	12.7	12.7	15.8	15.8	15.8
シフターストローク Shifter Stroke	mm	11.3	13.3	17.5	17.5	22.3	22.3	22.3
把握範囲 Chucking Dia.	内径 Inter Dia.	mm	12.7~120	16~152	50~203	63~241	76~317	89~394
	外径 Outer Dia.	mm	70~152	76~203	85~235	127~305	165~381	241~457
質量 Weight	kg	18.0	27.0	45.0	67.5	84.5	120.0	180.0
GD ²	N・m ²	1.47	4.70	12.05	23.72	83.20	148.67	245.00
適用シリンダ Applicable Cylinder		2R 105-15-02	2R 105-21-25	2R 120-21-25	2R 120-21-25	2R 150-21-25	2R 150-21-25	2R 150-21-25
A1	mm	4.4	4.0	4.0	4.0	12.7	12.7	12.7
A2	mm	10.6	12.0	13.5	13.5	24.7	24.7	24.7
A3	mm	15.7	17.3	21.5	21.5	35.0	35.0	35.0
B	mm	26.0	30.0	31.4	31.4	34.9	34.9	34.9
D	mm	162	200	254	300	381	457	533
E	mm	85.2	100.0	118.0	118.0	131.0	131.0	131.0
F	mm	M22P1.5	M22P1.5	M30P1.5	M30P1.5	M42P1.5	M45P1.5	M45P1.5
G	mm	59.2	70.0	86.6	86.6	96.1	96.1	96.1
L	mm	104.5	123.3	147.1	147.1	163.4	163.4	163.4
L1	mm	73.15	88.95	112.70	133.27	171.45	209.55	247.65
L2	mm	78.0	92.2	112.7	133.0	176.0	213.6	252.0
M	mm	17.0	17.0	20.0	20.0	26.5	33.5	33.5
M1	mm	17.3	22.1	30.0	50.6	65.8	103.9	142.0
M2	mm	22.2	25.3	30.1	50.7	69.8	107.9	146.0
N	mm	24.9	29.4	36.5	36.5	41.9	41.9	41.9
Q	mm	37.5	50.0	65.0	65.0	62.5	90.0	90.0
R	mm	67.5	85.0	105.0	105.0	107.5	145	145
T	mm	M8	M8	M10	M10	M12	M16	M16