Donaldson.

VIBRA SHAKE" DUST COLLECTOR

MODELS VS-550, 1200, 1500, 2400, AND 3000

A self-cleaning collector for intermittent applications where high collection efficiency is essential, such as reclaiming precious metals.

- Two-stage cartridge for high-efficiency filtration on both coarse and fine dusts
- Compact, self-contained collector design allows placement flexibility and saves floor space
- Preassembled for easy, low-cost installation —no need for compressed air
- Selection of inlet size and location for installation flexibility
- Recirculates filtered air saving heating and cooling costs
- Provides a cleaner work environment for maximum productivity
- Reduces plant maintenance costs




VS-550

Vibra Shake cartridge filter features proprietary Pleatloc[™] corrugation that assures uniform pleat spacing for better self-cleaning and longer filter life

- Filter screen captures coarse and fibrous particles
- Submicron particulates pass through the filter screen and are trapped by the inner layer of media
- Galvanized outer liner protects filter media
- · Easy filter changeout for quicker maintenance



OPERATIONAL EXPLANATION

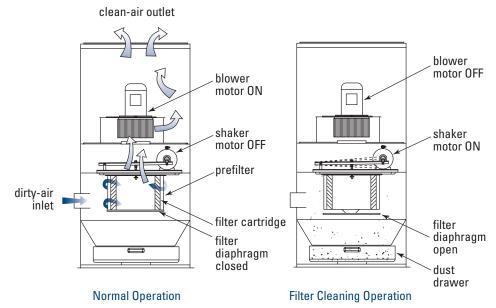

Automatic mechanical self-cleaning ensures the filter cartridge is cleaned every time the unit is shut off. It does an excellent job more cost effectively, and it does it quietly because of heavy-duty construction, special sound-attenuating material, and a vibration isolation motor mount.

MULTIPLE RATING TABLE

Model	Nominal Airflow*		Motor	Inlet		External Static Pressure			Model	Nominal Airflow*		Motor	Inlet		External Static Pressure	
	cfm	m³/h	(hp)	in	mm	in. of H ₂ O	mm of H_{a} O			cfm	m³/h	(hp)	in	mm	in. of H ₂ O	mm of H ₂ O
VS-550	550	934	1	4	102	4.3	109.2		VS-2400	2400	4077	5	8	203	5.7	144.8
	500	849	1	4	102	4.3	109.2			2200	3737	5	8	203	6.2	157.5
	450	764	1	4	102	4.6	116.8			2000	3397	5	8	203	6.7	170.2
	400	679	1	4	102	4.7	119.4			1800	3058	5	8	203	7.0	177.8
VS-1200	1243	2111	3	6	152	4.8	121.9			1600	2718	5	8	203	7.2	182.9
	1100	1869	3	6	152	5.8	147.3			1400	2378	5	8	203	7.4	188.0
	1000	1699	3	6	152	6.2	157.5		VS-3000	3300	5606	7.5	10	254	4.4	111.8
	800	1359	3	6	152	7.2	182.9			3000	5096	7.5	10	254	5.2	132.1
	700	1189	3	6	152	7.5	190.5			2800	4756	7.5	10	254	5.8	147.3
VS-1500	1525	2590	5	7	178	3.0	76.2			2600	4416	7.5	10	254	6.6	167.6
	1447	2458	5	7	178	3.6	91.4			2400	4077	7.5	10	254	7.1	180.3
	1348	2290	5	7	178	4.2	106.7			2200	3737	7.5	10	254	7.6	193.0
	1200	2038	5	7	178	5.2	132.1			2000	3397	7.5	10	254	8.0	203.2
	1000	1699	5	7	178	6.0	152.4			1800	3058	7.5	10	254	8.2	208.3


SPECIFICATIONS

Model	Nominal Airflow*		Filter Area		Dust Drawer Volume			g Weight)rawer	Shipping Hop	-	Sound Level
	cfm	m³/h	ft²	m²	ft³	m³	lb	kg	lb	kg	dB(A)**
VS-550	550	934	65	6.0	1.8	0.05	350	158.8	490	222.3	69
VS-1200	1200	2038	135	12.5	1.8	0.05	370	167.8	510	231.3	74
VS-1500	1500	2548	177	16.4	1.8	0.05	385	174.6	525	238.1	79
VS-2400	2400	4077	270	25.1	3.6	0.10	685	310.7	960	435.4	81
VS-3000	3000	5096	354	32.9	3.6	0.10	776	352.0	1050	476.3	83

* Based on clean filters.

** Published dB(A) sound levels are for units without HEPA filter and are an overall average. This average is determined for one operating condition and in a controlled laboratory environment. Actual installed equipment sound levels will vary depending on the measurement location, the operating condition, and the environment.

DIMENSIONS

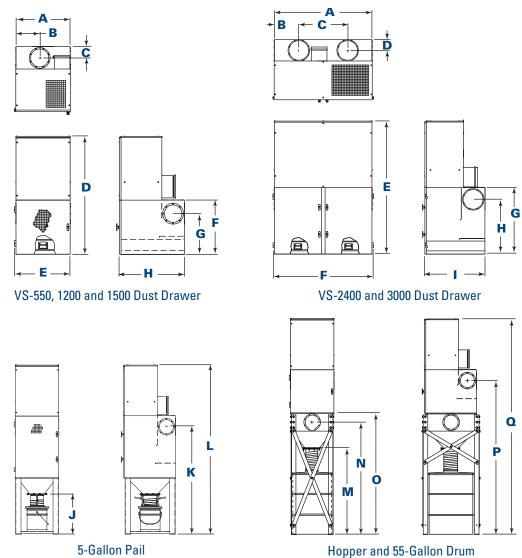

All Models

All Models

	Dimensions																	
Model		А		В		С		D		E		F		G	Н			I
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
VS-550	24.0	609.6	12.0	304.8	5.0	127.0	52.2	1325.9	24.7	627.4	24.1	612.1	18.1	459.7	30.8	782.3	-	-
VS-1200	24.0	609.6	12.0	304.8	5.0	127.0	62.2	1579.9	24.7	627.4	34.1	866.1	28.1	713.7	30.8	782.3	-	-
VS-1500	24.0	609.6	12.0	304.8	5.0	127.0	68.2	1732.3	24.7	627.4	40.1	1018.5	34.1	866.1	30.8	782.3	-	-
VS-2400	50.0	1270.0	12.5	317.5	25.0	635.0	5.5	139.7	69.2	1757.7	51.3	1303.0	34.2	868.7	28.1	713.7	33.0	838.2
VS-3000	50.0	1270.0	12.5	317.5	25.0	635.0	5.5	139.7	75.2	1910.1	51.3	1303.0	40.1	1018.5	34.1	866.1	33.0	838.2

								Dimen	isions							
Model		J		К		L	I	N	1	N		D		Р		۵
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
VS-550	22.3	566.4	49.5	1257.3	83.7	2126.0	48.0	1219.2	62.3	1582.4	67.3	1709.4	85.3	2166.6	119.4	3032.8
VS-1200	22.3	566.4	59.3	1506.2	93.7	2380.0	48.0	1219.2	62.3	1582.4	67.3	1709.4	101.4	2575.6	129.4	3286.8
VS-1500	22.3	566.4	65.5	1663.7	99.7	2532.4	48.0	1219.2	62.3	1582.4	67.3	1709.4	107.4	2728.0	135.4	3439.2
VS-2400	-	-	-	-	-	-	48.0	1219.2	-	-	-	-	103.6	2631.4	144.7	3675.4
VS-3000	-	-	-	-	-	-	48.0	1219.2	-	-	-	-	109.6	2783.8	150.7	3827.8

* 60 Hz models.

STANDARD FEATURES & AVAILABLE OPTIONS

Collector Design	Std	Opt
Integral Fan Housing with Motor	X	
Shaker Motor 1/8 hp, 115/60/1 TENV	X	
Inlet Collar	X	
Hinged Cartridge Access Door	X	
Prewired Cleaning Control NEMA 12	X	
Prewired Starter Controls		X
Louver Pack		X
Casters		X
Outriggers with 4" (102 mm) Casters (VS-550-1500)		X
Silencers (VS-2400 and VS-3000)		X
Extraction Arm		X
Cartridge Filters		
Two-Stage Filtration	X	
HEPA Afterfilters		X

Paint System	Std	Opt
Prime Coated Interior	X	
Textured Multi-Coat Paint Finish with 2,000-Hour Salt Spray Performance	X	
Epoxy Coating		X
Premium Duty Finish		X
Custom Colors, Materials, and Finishes		X
Hopper Discharge		
Dust Drawer Base	X	
5-Gallon (18.9 Liter) Pail Pack with and without Gate		X
55-Gallon (208.2 Liter) Drum Arrangement with and without Gate (does not include drum)		x
Slide Gate		X
Electrical Controls, Gauges and Enclosures		
Magnehelic®* Gauge		X
Warranty		
10-Year Warranty	X	

* Magnehelic[®] is a registered trademark of Dwyer Instruments, Inc.

Significantly improve the performance of your collector with genuine Donaldson Torit replacement filters and parts. **Call Donaldson Torit at 800-365-1331.**

Important Notice

Many factors beyond the control of Donaldson can affect the use and performance of Donaldson products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, product specifications, availability and data are subject to change without notice, and may vary by region or country.



Donaldson Company, Inc. Minneapolis, MN

donaldsontorit.com • shop.donaldson.com

North America Email: donaldsontorit@donaldson.com Phone: (USA): 800-365-1331 • (MX): 800-343-3639

Australasia

Email: marketing.australia@donaldson.com Phone: +61 2 4350 2000

Toll Free: (AU) 1800 345 837 • (NZ) 0800 743 387

China IAF Email: info.cn@donaldson.com Phone: (86) 400-820-1038

Donaldson Europe B.V.B.A. Email: IAF-europe@donaldson.com Phone: +32 (0) 16 38 38 11

India Email: marketing.India@donaldson.com Phone: +91 124 4807400 Toll Free: 18001035018

Latinoamerica Email: IndustrialAir@donaldson.com Phone: +52 449 300 2442

South Africa Email: SAMarketing@donaldson.com Phone: +27 11 997 6000

Southeast Asia IAF Email: IAF.SEA@donaldson.com Phone: (65) 63117373

F118170 ENG (06/18) Vibra Shake Dust Collector ©2011-2018 Donaldson Company, Inc. Donaldson Torit, Vibra Shake, Pleatloc, and the color blue are trademarks of Donaldson Company, Inc. All other marks belong to their respective owners.