


WPT-25AB Welding Positioner 2,500# capacity at 12"cg




WELD WIRE




Specification	WPT-25AB
Power	AC220V or 440V/30A/60Hz/3Ø
Table rotate motor	DC2HP/180V
Capacity	2500LBS.
Eccentricity	12"
Center of Gravity	12"
Table Dia.	35-3/8"
Spindle Thru Hole	4-11/16"
Adjustable Base	34-7/8" ; 42-3/4" ; 50-5/8"
Table speed	0.18 - 1.8RPM
Table angle	0° - 135°
Table angle speed	37 sec / 135°
Table angle motor	AC/1HP
Table angle lock	Motor brake
Table angle control	Up & Down (W/ 6'5" Cable)
Welding current	600A/100%
Table rotate control	Foot switch (W/ 6'5" Cable) & adjustable speed footswitch (W/ 6'5" Cable)
Control method	Manual / Hold
Remote control	Table speed adj. & Table rotate the direction cw. or ccw. (W/ 6'5" Cable)

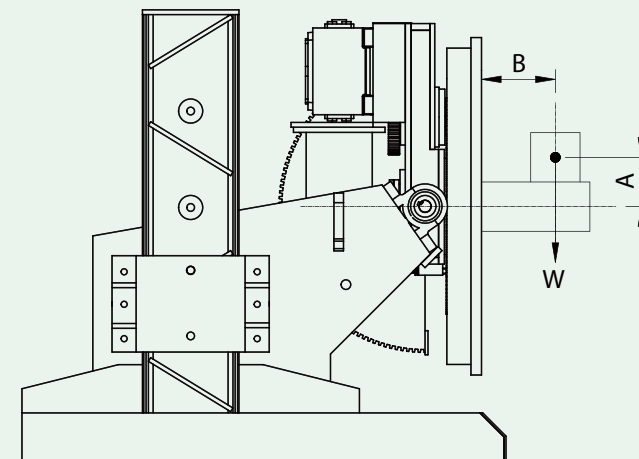

WPT-25AB Positioner Eccentric Load

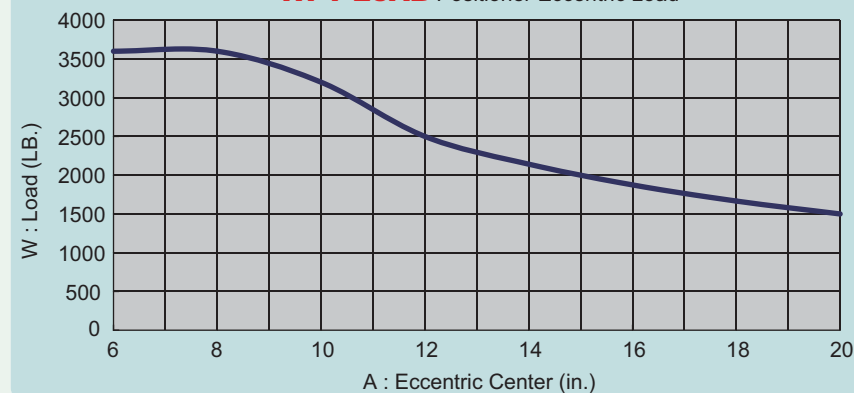

WPT-25AB Center of Gravity

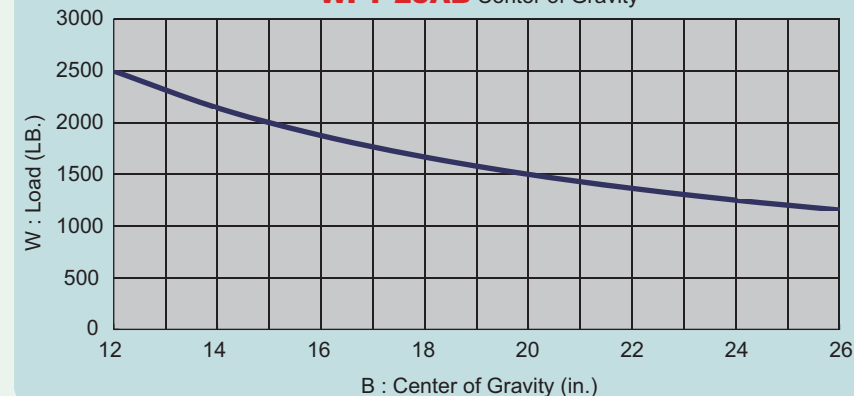

WPT-25AB Welding Positioner 2,500# capacity at 12"cg

