

CAP 1000+™ & CAP 2000+™

Cone & Plate Viscometers

Keypad for direct input of test parameters

Cone Spindle
Is easily removed for cleaning

Easy to use control handle for accurate, automatic cone positioning

Designed to handle repetitive testing in production environments with easy setup and cleaning

4-Line Display allows simultaneous viewing of all test parameters

Choice of instruments:
CAP1000+ (single speed)
CAP2000+ (variable speed)

Automatic cone/gap positioning

Small sample size
less than 1 mL

Built-in Peltier Plate
For temperature control of sample:
L Series: 5°C-75°C
H Series: 50°C-235°C



What's Included?

Instrument

Choice of Torque Range:

High Torque (ICI Specification): 181,000 dyne-cm

Low Torque: 7,970 dyne-cm

Choice of One Cone Spindle

Choice of Temperature Control: L or H

Optional Accessories

CAP Viscosity Standards

Additional Cone Spindle

CAPcalc32 Software

Protective Keypad Covers

CAP 1000+

Single speed 750 or 900 rpm instrument ideal for QC. Optional choice of alternative speed is available upon request. See examples below at 400 rpm and 100 rpm.

CAP 2000+

Variable speed 5-1000 rpm instrument ideal for R&D as well as more detailed QC testing. Automated PC control (using optional Capcalc32 software).

MODEL	VISCOSITY RANGE cP(mPa*s)		SPEEDS	
	Min.	Max.	RPM	Number of Increments
CAP 1000+	see chart on		900/750	2
CAP 2000+	(p15)		5-1K	995

* Dependant on cone selected.

M = 1 million K = 1 thousand cP = Centipoise mPa*s = Millipascal*seconds




Capcalc32 Software Optional

TURN YOUR CAP2000+ VISCOMETER INTO A MORE POWERFUL RHEOMETER

Capcalc32 allows control of the CAP 2000+ Viscometer while providing automatic data capture and graphical display. Automate your CAP 2000+ Viscometer and generate flow curves quickly and easily.

- Controls test parameters with powerful scripting capabilities
- Looping functions for repetitive tasks
- Automates data collection to save time.
- Reduces operator error
- Math modeling for yield stress calculations, plastic index
- Plot up to four data sets for comparisons

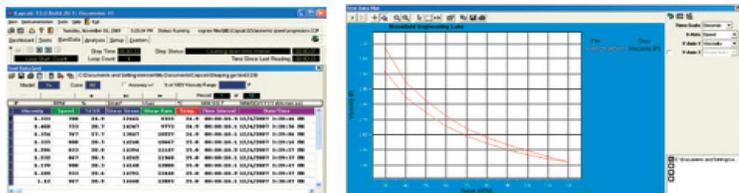

Perfect for Paints & Coatings

Meets Industry Standards:
ASTM D4287, ISO 2884, BS
3900 High Shear Rate Cone &
Plate (10,000 sec⁻¹)

Applications

MEDIUM VISCOSITY

Adhesives (hot melt)	Coatings	Resins
Architectural Coatings	Industrial Coatings	Starches
Autocoats (Hi-performance)	Inks (screen printing)	Surface
Creams	Organisols	UV Coatings
Food Products	Paints	Varnish
Gels	Paper Coatings	
Gums	Plastisols	

HIGH VISCOSITY

Adhesives	Gels	Sealants
Asphalt	Inks (ball point, offset, lithographic)	Sheet Molding
Compound		
Chocolate	Molasses	Tars
Composite Polymers	Pastes	Vinyl Esters
Epoxies	Roofing Compounds	

CAP Cone Viscosity Ranges (Poise)

MODEL	Shear Rate (sec ⁻¹): 13.3N Sample Volume: 67µL Cone Spindle: CAP-01	Shear Rate (sec ⁻¹): 13.3N Sample Volume: 30µL Cone Spindle: CAP-02	Shear Rate (sec ⁻¹): 13.3N Sample Volume: 24µL Cone Spindle: CAP-03	Shear Rate (sec ⁻¹): 13.3N Sample Volume: 13µL Cone Spindle: CAP-04	Shear Rate (sec ⁻¹): 3.3N Sample Volume: 67µL Cone Spindle: CAP-05	Shear Rate (sec ⁻¹): 3.3N Sample Volume: 30µL Cone Spindle: CAP-06	Shear Rate (sec ⁻¹): 2.0N Sample Volume: 1700µL Cone Spindle: CAP-07	Shear Rate (sec ⁻¹): 2.0N Sample Volume: 400µL Cone Spindle: CAP-08	Shear Rate (sec ⁻¹): 2.0N Sample Volume: 100µL Cone Spindle: CAP-09	Shear Rate (sec ⁻¹): 5.0N Sample Volume: 170µL Cone Spindle: CAP-10
HIGH TORQUE										
1000+ @750rpm	.25-2.5	.5-5	1-10	2-20	4-40	10-100	N/A	N/A	N/A	N/A
1000+ @900rpm	.2-2	.4-4	.8-8	1-16	3-33	8-83	N/A	N/A	N/A	N/A
1000+ @400rpm	.375-4.6	.75-9.3	1.5-18.7	3-37.5	6-75	15-187	.78-7.81*	3.13-31.3*	12.5-125*	1-10*
2000+ @5-1000rpm	.2-375	.4-750	.8-1.5K	1-3K	3-6K	8-15K	.78-625*	3.13-2.5K*	12.5-10K*	1-1K*
LOW TORQUE (for applications requiring low shear rates for low/medium viscosity fluids, an optional low torque 797-7,970 dyne•cm instrument can be ordered)										
1000+ @100rpm†	.2-.81	.2-1.6	.33-3.3	.65-6.5	1.3-13	3.3-33	.13-1.3	.54-5.4	2.2-22	.22-2.2
2000+ @5-1000rpm	.2-16	.2-32	.2-66	.2-130	.2-260	.2-660	.2-26	.2-108	.2-440	.2-44

µL = microLiter K = 1 thousand P = poise 1 Pa•s = 10 poise N = RPM e.g. Cone CAP-01 13.3 x 10 (rpm) = 133 sec⁻¹

*Maximum speed recommended with this spindle is 400 rpm. Viscosity range indicated is for operation at 400 rpm. †Special speed instrument.

Note: Viscosity ranges shown above are for illustration. The exact range will depend upon instrument configuration.

