



Variable Rake type Hydraulic Shear



VSHS-6X3100




NC HT071 (Italy)



MA10/4 (Germany)

- All steel welded structure, consolidated treatment for removal of internal stress (vibrating aging, heat), with good rigidity and stability.
- Integrated hydraulic transmission system, with good reliability.
- Triple support rolling guide rail to eliminate gaps of support and enhance shearing quality.
- Mechanical rear stopper with manual fine turning, and digital indication.
- Clearance in between shearing blades adjusted by hand wheel to be quick, accurate and convenient.
- Rectangular blades with four cutting edges to prolong working life, adjustable shearing angle to reduce deformation of the sheet.
- Upper blade holder has inward tilting structure to facilitate material feed in and also enhance accuracy of the work piece.
- Function of shearing in sections, function of aligning with light.
- Optional: rear material holding device (or for other choice).

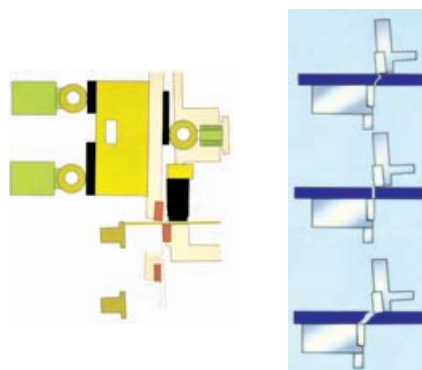

QC11Y-6x2500



QC11Y-6x3100



QC11Y-12x2500



Toptech Smac Machinery Limited

Add: Unit 5, 5510 Ambler Dr, Mississauga, ON, L4W2V1, Canada


Email: info@smacmachinery.com, songjingru@vip.163.com

Hotline: 416 409 0666; 416 436 9039; 905 238 8912



Variable Rake type Hydraulic Shear

VSHS SERIES

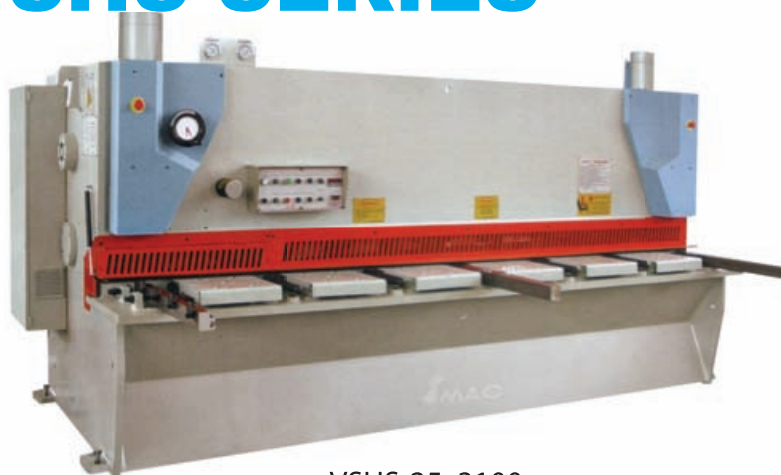

VSHS-25x3100



VSHS-12x3100



VSHS-16x6000

Model	Mild steel (45kg/mm ²)	Cutting lebgth(mm)	Stroke per minute (spm)	Back gauge range(mm)	Rake angle adjustment(°)	Depth of throat(mm)	Motor power (kw)	Weight (kg)	L x W x H (mm)
VSHS-6x2500	6	2500	10-45	750	0.5-2.5	70	7.5	4850	3240x1770x1980
VSHS-6x3100	6	3100	8-45	750	0.5-2.5	70	7.5	5600	3790x1880x2030
VSHS-6x4000	6	4000	7-45	750	0.5-2.5	70	7.5	7050	4740x1805x2110
VSHS-6x6000	6	6000	5-30	750	0.5-2.5	100	15	8000	6900x2170x2750
VSHS-8x2500	8	2500	10-45	750	0.5-2.5	100	11	5300	3240x1770x2010
VSHS-8x3100	8	3100	8-45	750	0.5-2.5	100	11	6100	3800x1800x2060
VSHS-8x4000	8	4000	7-45	750	0.5-2.5	100	11	7700	4750x1805x2140
VSHS-8x6000	8	6000	5-30	750	0.5-2.5	100	22	22000	6900x2200x2800
VSHS-10x2500	10	2500	10-35	750	0.5-2.5	100	11	6600	3310x1850x2160
VSHS-10x3100	10	3100	8-35	750	0.5-2.5	100	11	7300	3860x1870x2170
VSHS-10x4000	10	4000	6-35	750	0.5-2.5	100	11	9200	4810x1920x2350
VSHS-12x2500	12	2500	10-35	1000	0.5-2.5	100	15	8000	3310x2180x2270
VSHS-12x3100	12	3100	8-35	1000	0.5-2.5	100	15	9000	3860x2200x2335
VSHS-12x4000	12	4000	6-35	1000	0.5-2.5	100	15	11600	4810x2220x2495
VSHS-12x6000	12	6000	4-12	1000	0.5-2.5	100	30	29000	6950x2350x3050
VSHS-14x6000	14	6000	4-12	1000	0.5-2.5	100	30	30000	7000x2350x3050
VSHS-16x2500	16	2500	8-30	1000	0.5-3.0	100	30	9600	3350x2190x2350
VSHS-16x3100	16	3100	7-30	1000	0.5-3.0	100	30	12500	3900x2190x2430
VSHS-16x4000	16	4000	6-30	1000	0.5-3.0	100	30	15200	4850x2340x2575
VSHS-16x6000	16	6000	4-12	1000	0.5-2.5	100	37	36000	7000x2400x3100
VSHS-20x2500	20	2500	8-30	1000	0.5-3.5	100	30	17000	3385x2140x2665
VSHS-20x3100	20	3100	7-30	1000	0.5-3.5	100	30	19000	3935x2260x3030
VSHS-20x4000	20	4000	6-30	1000	0.5-3.5	100	30	21000	4935x2330x3045
VSHS-20x6000	20	6000	3-10	1000	0.5-2.5	100	60	50000	7050x2600x3200
VSHS-25x2500	25	2500	5-30	1000	0.5-3.5	100	37	22000	3940x2555x3150
VSHS-25x3100	25	3100	4-30	1000	0.5-3.5	100	37	26000	3970x2230x3160
VSHS-25x4000	25	4000	3-30	1000	0.5-3.5	100	37	28000	4920x2250x3300



Toptech Smac Machinery Limited

Add: Unit 5, 5510 Ambler Dr, Mississauga, ON, L4W2V1, Canada

Email: info@smacmachinery.com, songjingru@vip.163.com

Hotline: 416 409 0666; 416 436 9039; 905 238 8912